


PRP-058

POS Printer

Line Thermal Receipt Printer

PRP-058 is designed for use with ECR, electronic instruments, computer peripheral equipment, kitchen printers and so on. Besides, it also features compatibility with ESC/POS commands

While your hotspot gateway is operating for wireless access service, the account information (such as username, password, SSID and etc.) can be readily output to PRP-058 via DS-100 and printed out as account tickets.

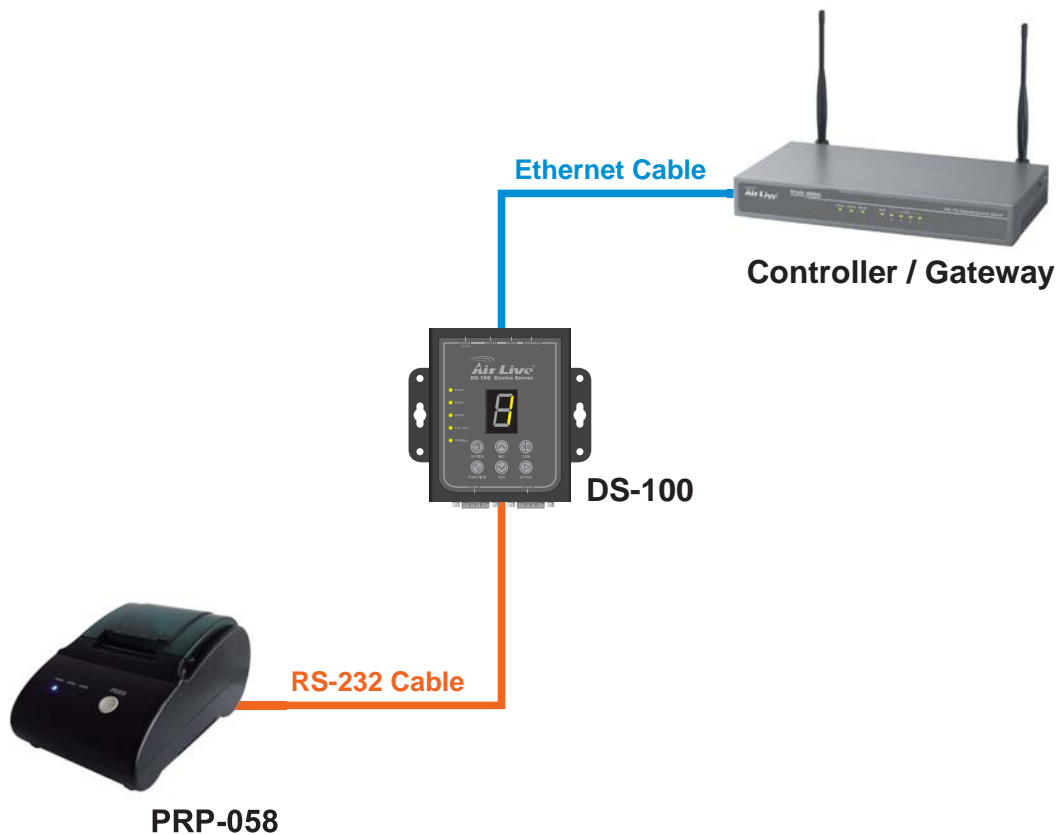

Specifications

Print Method

- Direct thermal

Paper Width

- 57.5 mm \pm 0.3mm

Effective Print Width

- 48 mm

Print Speed

- Approx. 50 mm/sec or 14 lines/sec

Print Head

- Print density: 384 dots/line or 8 dots/mm
- Print dot space: 0.125mm
- Print life: 50 km
- Overheat suspension protection

Interface

- Dsub 25-pin female connector
- 9600 bps, none, 8bits, 1 stop bit
- RTS/CTS and Xon/Xoff protocol

LED Indicator

- Power: shows power on/off status
- Error: indicate the printer error
- Paper: indicate out of paper or printer cover is not close properly

Button

- Feed: to feed roll paper

ASCII Character

- 12 x 24 dots, 1.24 mm(W) x 3.00 mm (H)

Print Commands

- ESC/POS

Paper Type

- Thermal

Paper Parameters

- Width: 57.5 \pm 0.5 mm
- Max. diameter: 55 mm
- Thickness: 53~60 g/m²

Power supply

- 8.8VDC / 3.5A

Temperature

- Operating: 0 to 50°C
- Storage: -10 to 50°C

Humidity

- Operating: 10% ~ 80% RH
- Storage: 10% ~ 90% RH

Produce Weight (g)

- 760 g

Dimensions

- 185 x 116 x 93

Ordering Information:

AirLive PRP-058 POS Printer