



300Mbps Outdoor 23dBi Dish Wireless TDMA Bridge / CPE

WIS-D5230

Version 1.0

Wisnetworks Technologies Co., Ltd.

Sales e-mail: info@wisnetworks.com Web: www.wisnetworks.com

Address: No.77, FuTe West 3 Road, China (Shanghai) Pilot Free Trade Zone


Product Overview

WIS-D5230 is a 300Mbps 2*2 MIMO outdoor wireless dish bridge for long range point-to-point and point-to-multi-point solutions. It is the most cost-effective and ultimate solution for WISP CPE, which provides incredible long range much better than any other vendors solution.

Features


Incredible Long Range

- Up to 25dBm Tx Power
- Dish Antenna Gain 23dBi
- Radio-in-Feed design reduces cable loss
- Narrower Beamwidth for noise immunity

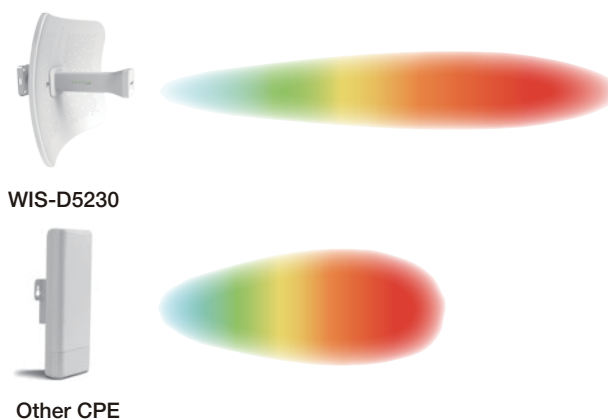

Revolutionary Design

- Disassembled Dish Design
- 360 Universal Antenna Alignment
- IP66 Waterproof

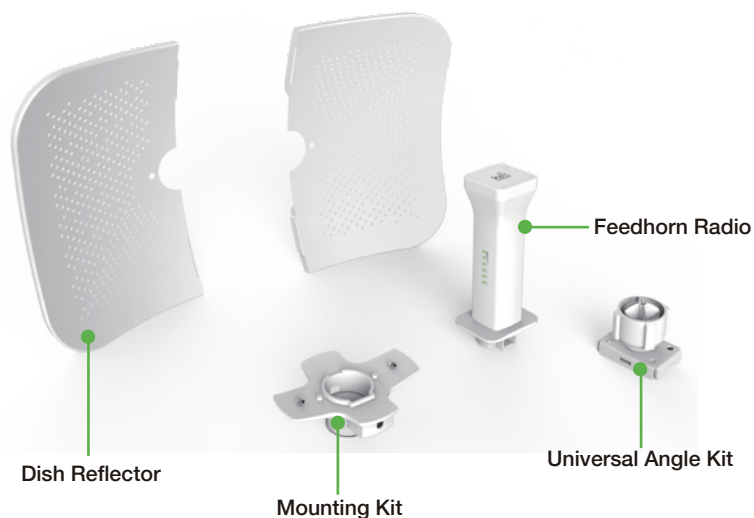


Full Feature & Performance

- Full WisOS Support
- Auto-Distance Adjust
- 30km+ Availability
- Fully Managed by WiController




Features and Benefits

- WiD TDMA greatly improves the network scalability in throughput and latency
- Compliant with 802.11n/a, speed up to 300Mbps
- 23dBi dual-polarized dish antenna to build robust long range wireless PtP link
- High output transmission power and receive sensitivity optimized
- 40/20/10/5MHz selectable for channel bandwidth
- Easy deployment and adjustment with provided mounting kits
- Managed with web interface or by NMS WiController
- Passive POE(24VDC) for flexible deployment
- Weather-proof design for outdoor environment
- Up to16kV ESD protection



Network Diagram

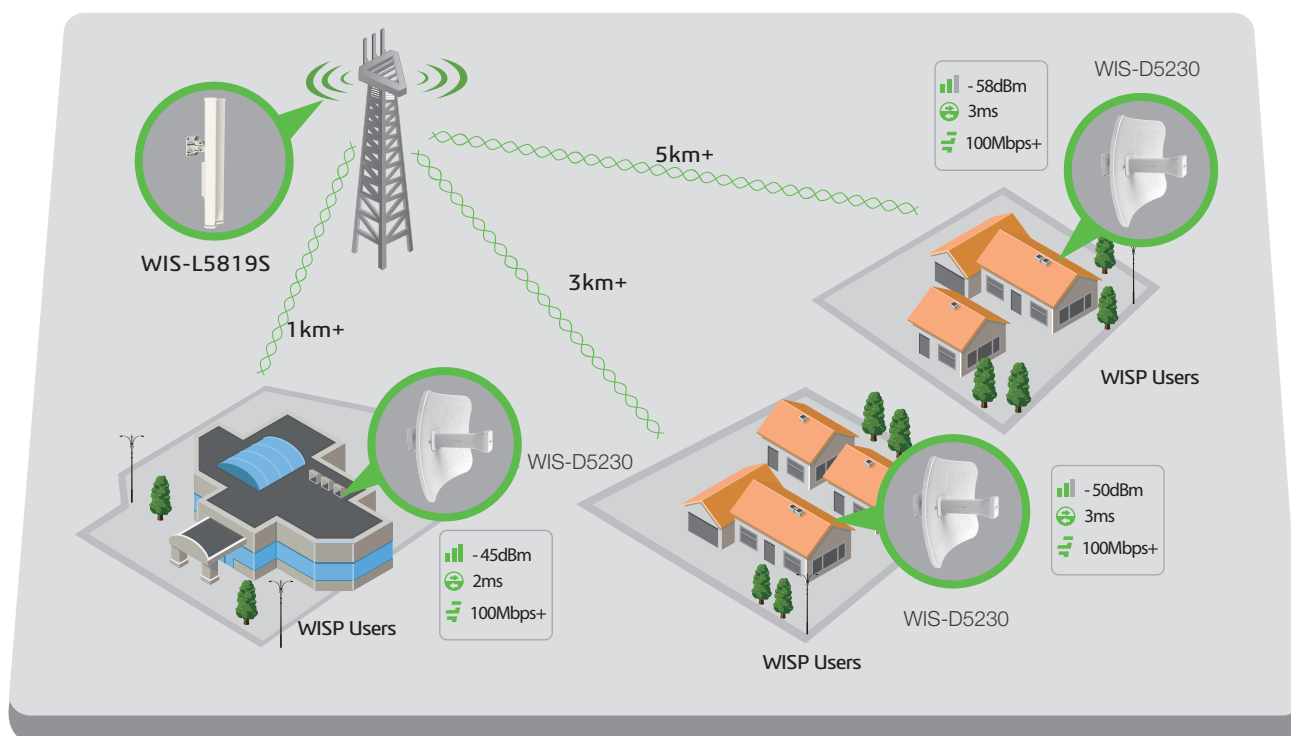

Specification

> Radio

- 802.11a/n radio (Atheros 600MHz)
- Speed up to 300 Mbps
- WiD TDMA Support
- Frequency Range: 4.9~6.1GHz
- Tx Power up to 23dBm
- Rx Sensitivity 300M: -74dBm@10% PER
54M: -78dBm@10% PER
1M: -98dBm@10% PER

> Antenna

- 23dBi dual-polarized dish antenna
- Beamwidth(HPBW) Horizontal: 10°, Vertical: 10°
- Open space up to 1~30km (dependent)

>Physical Parameters

- Dimension: 350*270*255mm
- Wight: 3kg
- Feedhorn enclosure: ASA Weatherproof
- ESD Protection: 16kV
- Working Temp: -40 ~ 70°C
- Storage Temp: -40 ~85°C
- Working Humidity: 10%~95% non-condensing

> Power

- 24VDC, 0.75A (Passive PoE)
- Power Consumption: 6W

>Security

- Integrated Firewall
- WPA/WPA2;WPA-PSK/WPA2-PSK (AES/TKIP) Encryption; 64/128-bit WEP;

> Interfaces

- 1x 10/100Base-T Ethernet (24VDC Passive PoE)

> LED

- Power:On/Off
- LAN:On/Off/Flashing
- WLAN:On/Off/Flashing
- RSSI Signal: 1,2,3

>Warranty

- 2 Year

>Certification

- CE, RoHS

>Package content

- WIS-D5230 Feedhorn Radio
- Feed Receiver
- Quick Setup Guide
- Power Adapter with Passive PoE
- Mounting bracket & kits

Antenna Information

